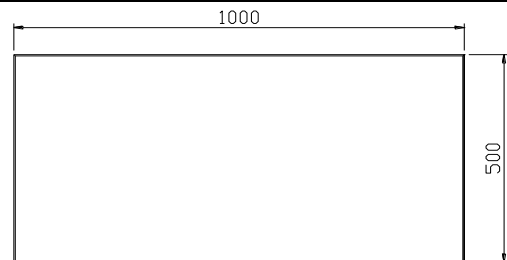
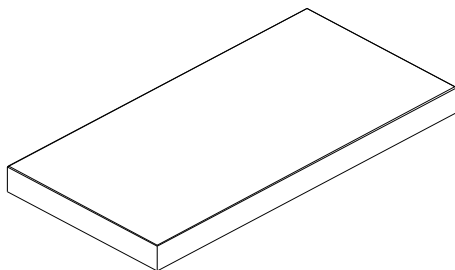


CONCRETE PAVIN FLAGS


Product Name	GIGA 50
Product Line	GRANITI
Production site	PALAZZAGO
Weight each sqm	280
module size number	-
Maximum load class	2B
Intended Use:	EXTERNAL FLOORINGS

Technical performances according to UNI EN 1339 STANDARD

SHAPE AND DIMENSIONS (UNI EN 1339 p.to 5.2)		Physical and mechanical properties (UNI EN 1339 p.to 5.3)	
Thickness	120 ± 3 mm (Class 2P)	Water absorption/Mass loss after freeze-thaw test	Class 3D / ≤ 1,0 Kg/m²
Length	1000 ± 3 mm (Class 2P)	Breaking strength	Class 2T (≥ 4 MPa)
Width	500 ± 3 mm (Class 2P)	Compression resistance	not relevant
Permissible diagonal deviation	Class 3L (4 mm)	Abrasion resistance	Class 3H (≤ 23 mm)
Maximum convex	5,0 mm/m	Slip/skid resistance	≥ 60 (Graniti)
Maximum concave	3,0 mm/m	Emission of asbestos	Absent
		Thermal conductivity	not relevant
		Reaction to fire	Class A1
		External fire performance	Satisfactory
		SRI index(ASTM E 1980-01)	≥ 34 Grigio ≥ 39 Pietra Del Nord ≥ 53 Bianco ≥ 78 Superbianco


Further prescription information

(further prescription related to construction site specifics, laying schemes, laying tips to be filled by project designer or general contractor)